

## ARQIS108

### CABINET LOUDSPEAKERS

#### *Architectural Loudspeaker Cabinet*



### PRODUCT OVERVIEW

ARQIS108 is a 2-way wooden loudspeaker cabinet with a compact format, stylish aesthetics, excellent sound quality and long term reliability, featuring 175 WRMS @ 8 ohm, 8" woofer and 1" HF Compression Driver. Its smart wall bracket (included), allows for pan&tilt adjustment, employing a single screw for fastening. It has been specifically designed to fulfil permanent installation requirements where a perfect balance between sound performance and architectural/interior's design matching is a must.

### KEY FEATURES


- Full range, 2-way architectural loudspeaker
- 175 WRMS @ 8 ohm
- 8" low frequency woofer
- 1" high frequency compression driver (rotatable)
- Double INPUT/STACK connector, Euroblock + Speakon® type, with security attachment screws to avoid accidental disconnection
- Wall bracket included, allowing for pan&tilt adjustment, employing a single screw for fastening
- U-bracket wall-mount accessory compatible (not included)
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

### APPLICATIONS

- Shopping malls
- Sports centres
- Theatres / auditoriums
- Conference rooms
- A/V presentations
- Corporate rooms
- Perimeter reinforcement in clubs
- Cafés
- Restaurants
- Theme parks

### ACCESSORIES AND COMPATIBLE PRODUCTS


- ARQ108UB (U-bracket wall-mount)

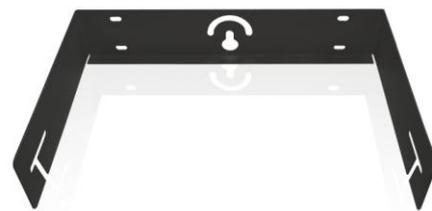

ARQ108UB


POLAR DIAGRAMS

HORIZONTAL

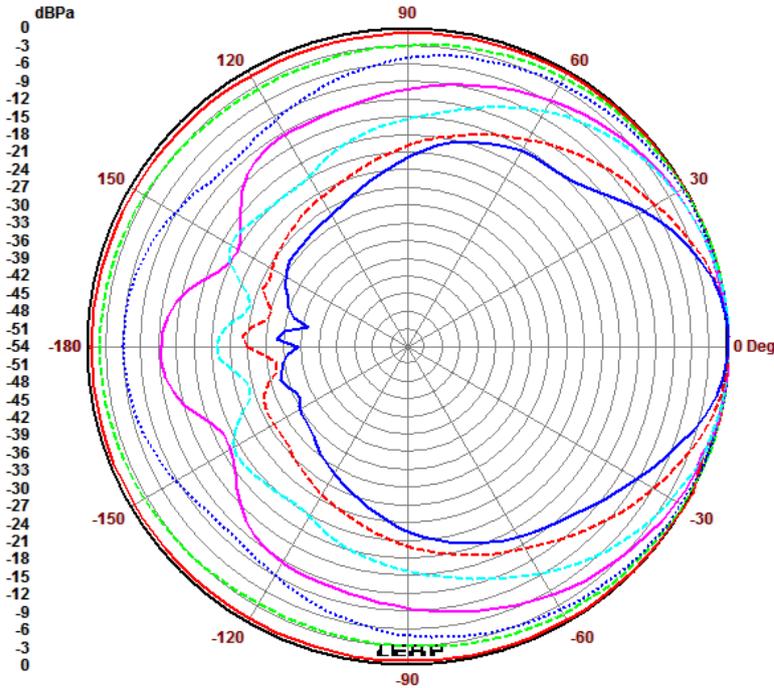


Curve	Freq	BW	Q	DI
—	125.00	360	1.0	0.0
- - -	250.00	360	1.0	0.0
⋯	500.00	193	1.9	2.7
—	1.00K	124	2.9	4.6
- - -	2.00K	98	3.7	5.6
- - -	4.00K	55	6.6	8.2
—	8.00K	44	8.2	9.2

VERTICAL

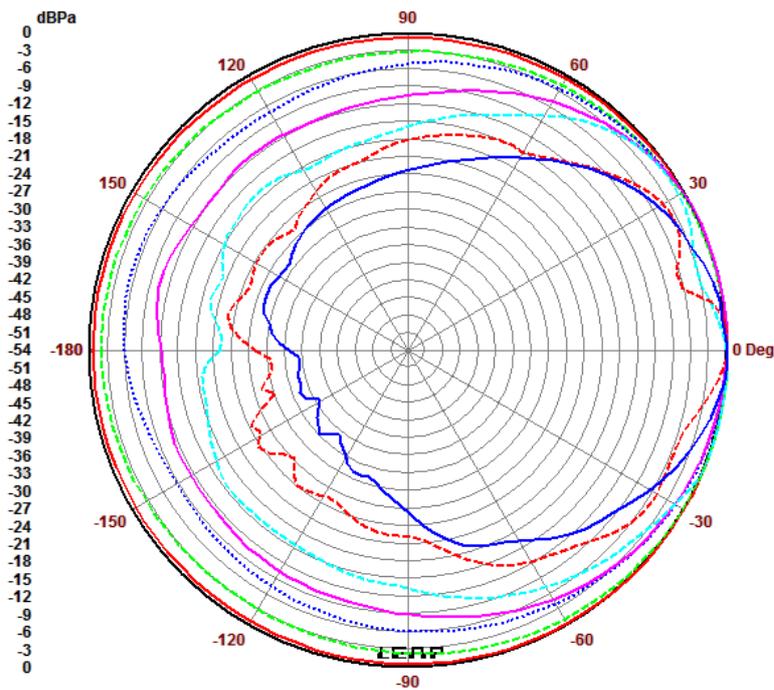

Curve	Freq	BW	Q	DI
—	125.00	360	1.0	0.0
- - -	250.00	360	1.0	0.0
⋯	500.00	185	1.9	2.9
—	1.00K	131	2.7	4.4
- - -	2.00K	102	3.5	5.5
- - -	4.00K	44	8.2	9.2
—	8.00K	58	6.2	7.9

## FREQUENCY RESPONSE

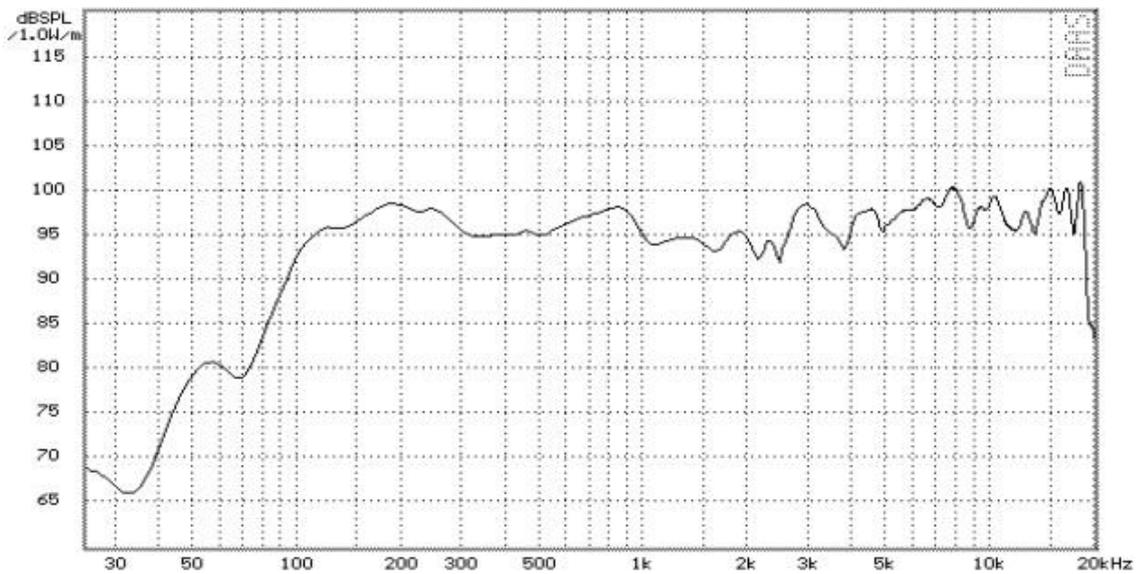

## TECHNICAL DATA

<b>Ways</b>	2
<b>Impedance</b>	8Ω
<b>RMS power</b>	175 WRMS
<b>Program power</b>	350 WRMS
<b>Sensitivity</b>	93dB
<b>Sound pressure</b>	118dB
<b>Frequency response (±3dB)</b>	60Hz±19kHz
<b>Cross-over frequency</b>	3.5kHz
<b>Dispersion (HxV)</b>	90°x60°
<b>Driver LF/MF</b>	8"
<b>Driver HF</b>	Compression driver 1"
<b>Connection</b>	Euroblock 2 ways + Speakon® 4 ways
<b>Dimensions (WxHxD)</b>	244x390x280mm
<b>Weight</b>	8.4kg
<b>Color</b>	Black (RAL 9005) / White (RAL 9016)