

## NXA4-700

### DIGITAL AUDIO MANAGERS

#### *Powered Digital Audio Manager*



### PRODUCT OVERVIEW

NXA4-700 is a 4 channel self-powered digital manager that stays halfway between a digital matrix and a multichannel amplifier. An "all-in-one" digital audio device that becomes a complete audio solution, including several remote control options and a long list of smart features.

#### KEY FEATURES

- 4 analogue audio inputs x 4 powered audio outputs
- Class D amplifiers (eco friendly)
- Auto stand-by function (eco friendly)
- 100% silent (fanless convection cooling system)
- Health self-test mode function, with FAULT RELAY (for an external redundancy system)
- Integrated anti-clip system
- Integrated DSP processor. Main features:
  - Inputs mixer independent per channel (all inputs available)
  - VOLUME, MUTE, SOLO, PHASE INVERSION, MAX. VOL limit and MIN.VOL limit, LP and HP Crossover filters, parametric EQ filters bank, Ducker, Delay, Compressor and more settings configurable per channel.
  - Ethernet interface, compatible with EclerNet Manager platform and UCP remote control system
  - TP-NET third-party remote control (compatible with CRESTRON®, AMX®, RTI®, VITY®, etc.)


#### APPLICATIONS

- Live sound
- Centralized, distributed or hybrid fixed installation
- Integration in installation global control systems
- Big Public Address zoned systems
- Installations requiring remote supervision, diagnostic and adjustment via Internet

#### CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

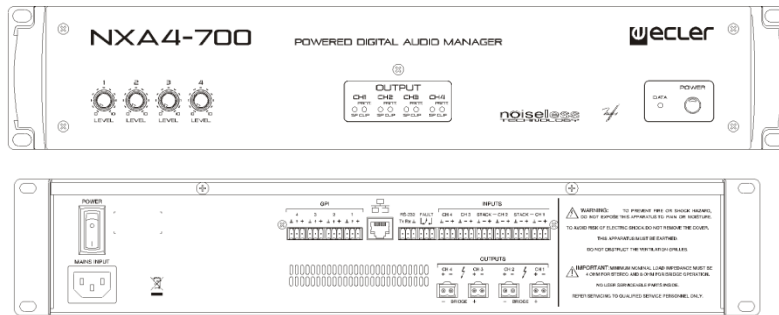

TECHNICAL DATA

<b>Power 20Hz-20kHz 1% THD</b>	
1 Channel @ 2Ω	1.220 WRMS
1 Channel @ 4Ω	730 WRMS
1 Channel @ 8Ω	406 WRMS
All Channels @ 4Ω	530 WRMS
All Channels @ 8Ω	327 WRMS
1 Bridge channel @ 8Ω	1.180 WRMS
1 Bridge channel @ 4Ω	2.070 WRMS
Overall Voltage Gain	+26 / +32 dB
Frequency response (-1dB, -3dB)	10Hz – 25kHz
THD + Noise @ 1kHz Full power	<0.08%
Noise Floor (FFT) 20Hz – 20KHz	>100dB (110dB typ.)
Damping factor 1kHz @ 8Ω	>200
Channel Crosstalk @ 1kHz	>75dB
Input connectors	Terminal block (Symmetrical)
Input CMRR/ref. Max. PWR	>50dB
Signal present indicator	Lit at -40dBV
Output connectors	Terminal block
Anticlip limiter	Soft / Mid / Hard
Volume remote control	(0-10VDC) (0.1A max.) 0V = no attenuation / +10V = full attenuation
Remote control connectors	Terminal block
Mains	Depending on your country. See characteristics in the back of the unit.
<b>Power consumption</b>	
(pink noise, 1/8 power @ 4ohm)	729VA
(pink noise, 1/3 power @ 4ohm)	160VA
Stand-by mains consumption	<3W
Panel Dimensions	482.6x88mm
Depth (Handles and knobs excluded)	423mm
Weight	19.0kg
<b>Processing</b>	
A/D & D/A	24 bit, 48kHz. 115dB AKM Codec
DSP	32/64 bits
Latency	2ms
Analog Input headroom	+18 dBV = +21dBu
Digital Input attenuator	Stepless from -∞ to +0dB
Input Impedance	Balanced, 22kΩ
Maximum Delay	1s (343.4m) for each channel
Delay resolution	20.8μs (6mm)
<b>Compressor / Limiter</b>	
Threshold	from -36dBV to +18dBV
Ratio	1:1 to ∞:1 (limiter)
Attack time	Auto or from 0.1ms to 500ms.
Release time	Auto or from 1ms to 5s.
<b>Output peak voltage limiter</b>	
Peak voltage upon model (auto settings)	From 10Vpk to 70Vpk

<b>High &amp; Low pass Crossover filters</b>	Butterworth in 6/12/18/24dB/oct. Bessel in 12/18/24dB/oct. Linkwitz-Riley in 12/24dB/oct.
<b>Parametric Eq types (8 max. per output)</b>	Bypass / On-Off all channels Param. Eq. 20Hz-20kHz; -60/+12dB; Q from 0.3 to 200 Low & High Shelf 6/12 dB/oct Low & High Pass 6/12 dB/oct. All-Pass 1/2 order
<b>Built In signal generator</b>	Sine (20Hz to 20kHz) Polarity (10/20Hz to 10/20kHz) White Pink
<b>Signal Mute</b>	Yes
<b>Signal Polarity Invert</b>	Yes
<b>Connectivity</b>	Ethernet Base-Tx 10/100Mb, Auto X-Over, Cat5 RS232 57600 (fixed)-8-N-1-N
<b>Software</b>	Realtime full GUI of all functions and controls through Ethernet with interactive graphical display Grouping mode channels or devices Automated report generation Remote power on with programmable delay. Up to 256 devices on same net. Autodiscovery devices feature Routing capability through NAT gateways. Real time metering at input/output (DSP) <b>EclerNet Software</b> Device "Finder" feature Save & Recall setup and preset functions Firmware update capability thru Ethernet Password protection Default Network configuration: IP: 192.168.0.100 Mask: 255.255.255.0 Gate: 192.168.0.1 UDP Port: 2210
<b>Operating System</b>	Windows®: XP Prof. (SP3); Vista (SP1); W7(SP1), W8, W10 and W11. Pentium IV @ 2GHz 500MB RAM
<b>Minimum EclerNet System Requirements</b>	100MB HDD free space 1024x768 pixels & 16bits color display 10/100/1000 Ethernet Network card