

MPAGE1

PAGING STATIONS

Desktop Paging Station



PRODUCT OVERVIEW

MPAGE1 is a 1-zone desktop paging station, compatible with any device including a phantom-powered microphone input (SAM series, COMPACT series, DAM614, MIMO88, CA series, HMA series, etc.).


KEY FEATURES

- 1 zone paging station
- PAGE key
- "PAGE ACTIVE" trigger port (GPO), for its connection to external devices (open collector port)
- Gooseneck microphone

APPLICATIONS

- Paging, voice messages and speech

MECHANICAL DIAGRAMS

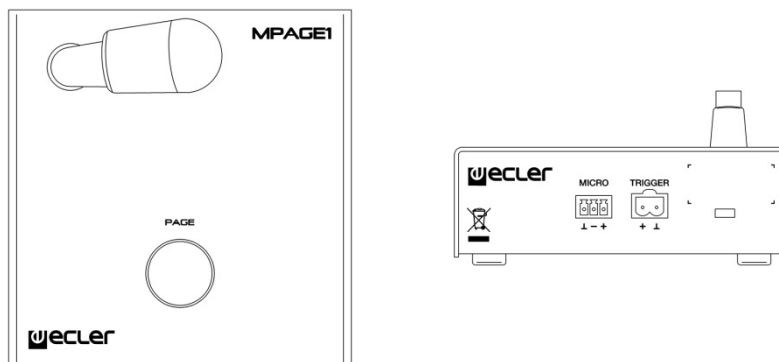

TECHNICAL DATA

Microphone type	Non-removable gooseneck condenser microphone
Polar pattern	Cardioid
Microphone frequency response	50Hz - 18KHz (-10dB)
Output level	-20dBV @ 104dB SPL
Page mute	80dB typ.
Audio output	Balanced, detachable 3 pole screw terminal
Maximum audio cable length	Twisted pair 5m, Shielded 60m
Control output (TRIGGER port)	Open Collector, drain N channel mosfet N.C.
Control rating	Max. +48VDC/0.1A
Control connector	Detachable 2 pole screw terminal
Phantom power supply	+10 to +48VDC
Power consumption	2mA max. (1.4mA @ +18VDC)
Dimensions (microphone excluded)	W 120mm x D 126mm x H 43mm
Weight	625 g
Included accessories	Windscreen, connectors