

VERSO10P

CABINET LOUDSPEAKERS

Self-powered Loudspeaker Cabinet



PRODUCT OVERVIEW

VERSO10P is a full range, self-powered 2-way loudspeaker made of high-density and great resistance plastic material. It features a 10" polypropylene woofer and 1,3" HF compression driver.

Its external cosmetic design, modern and balanced, has been created with the collaboration of the reputed team Giugiaro Design.

KEY FEATURES

- Full range, 2-way, self-powered loudspeaker
- 10" woofer / 1,3" HF compression driver
- Active crossover with 24 dB/oct slope
- Two MICRO/LINE XLR inputs with sensitivity switch
- Two-way mixer
- 3-band tone control at mixer output
- Balanced "STACK OUT" output for connection to other units or amplifiers
- Effective protection system to reduce signal clipping
- Carry handles at the rear
- 6 flying points (M6)
- Prepared for landscape installation on the ground, with no need for accessories
- Protective grill at the front, acoustically transparent
- 35 mm stand at the base for pole mount
- EASE Win file available



APPLICATIONS


- Sound for events and audiovisual presentations
- Sound reinforcement
- Stage monitors
- Clubs, discos and leisure centres
- Mobile discos and shows

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE




MECHANICAL DIAGRAMS





POLAR DIAGRAMS

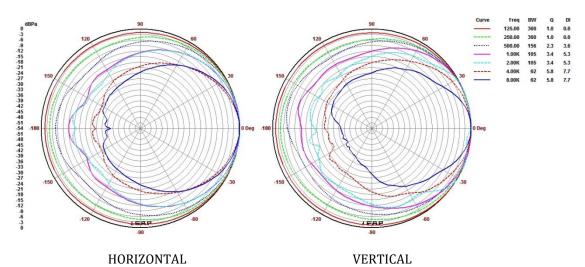

TECHNICAL DATA

System	Active Crossover two way full range active cabinet
Driver	10" woofer + 1,3" compression driver
Power Output	300W
Maximum SPL (dB@1m)	120dB
Dispersion (HxV)	80° x 60°
Input sensitivity nom/impedance	Micro –40dBV 10mV 20Ω (Balanced)
	Line –10dBV 316mV 20Ω (Balanced)
Connector type	XLR3
Flying points	6xM6
Frequency response (-10dB)	65Hz~20kHz
Tone Control Crossover frequencies	250Hz-5.5kHz
Gain	-20dB +10dB
Signal present indicator	-35dBV
Mains	AC 115V/230V 50-60Hz
Power consumption (pink noise, 1/8 power @ 4ohm)	95VA
Power consumption (pink noise, 1/3 power @ 4ohm)	112VA
Power consumption (max. power)	680VA
Dimensions (WxDxH)	350 x 290 x 475mm
Weight	16kg

2/2