

WPNETEX

DIGITAL CONTROLS AND PANELS

EclerNet wall panel control



PRODUCT OVERVIEW

WPNETEX is an EclerNet compatible wall panel, featuring an LCD screen, a digital rotary encoder and 4 control keys. Its end-user control features are volume control, source and preset selection and 3 band EQ functions. Equipped with Ethernet interface and compatible with PoE (Power over Ethernet) or local power supply (optional).

KEY FEATURES

- Remote control panel of EclerNet devices
- PoE power or by local power supply (WP-PSU model, optional)
- Ethernet communication interface

APPLICATIONS






- End user control in centralized, distributed or hybrid fixed installations over long distances
- Integrated digital audio and control solutions using Ethernet networks
- BGM & Paging solutions
- Retail, education, corporate, fitness and Horeca

TECHNICAL DATA

WPNETEX

DIGITAL CHARACTERISTICS:	
Control keys	Encoder, 4 CONTROL keys
Indicators	LCD Display – 128x128 Pixels
Communication Standard	Ethernet
SUPPLY CHARACTERISTICS:	
Poe Power supply	PoE: class 0 802.3af Poe PD compliant
External Power supply	12 - 24VDC
Maximum Power Consumption	From PoE: 35mA / 1.6W From Ext Power: 1.5W (WP-PSU power supply model)
MISCELLANEOUS:	
Connector	RJ45 Remote port
Finished colour	White (RAL 9016)
Dimensions	W 86mm x D 30mm x H 86mm
Weight	120gr
Cable Quality	CAT-5e or better

MECHANICAL DIAGRAMS

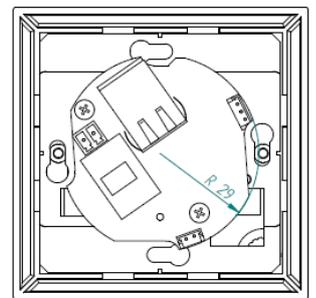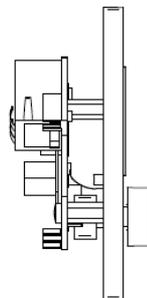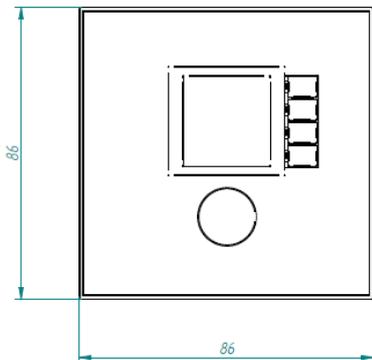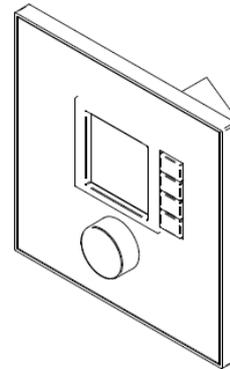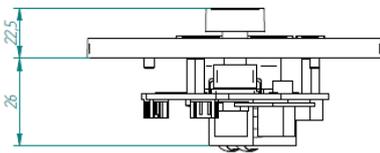



All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications

For technical queries contact your supplier, distributor or complete the contact form on our website, in [Support / Technical requests](#).

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | information@ecler.com | www.ecler.com