

eSAM702

ANALOGUE PREAMPLIFIERS & MIXERS

Installation Analogue Mixer



PRODUCT OVERVIEW

ECLER ESSENTIALS eSAM702 is an installation audio mixer in standard rack format, featuring 6 MIC/LINE ST inputs, 1 LINE ST input, 1 main mix output and one AUX/REC additional output. It includes a 3 band tone control section, Talkover (priority) function assignable to each MIC/LINE input over the mix bus, ST/MONO mix switch and MUTE port for external dry contact triggering.

KEY FEATURES

- 7 input channels, 2 outputs 19" installation mixer
- 6 MIC/LINE ST inputs
- 1 LINE ST input
- 1 main mix output and one AUX/REC additional output
- 3 band tone control section
- Talkover (priority) function assignable from each MIC/LINE input over the mix
- Micro sensitivity level can be adjusted on the back panel
- +18V Phantom Power available for all MIC inputs
- Universal external power supply (multi-plug)

APPLICATIONS

- Gyms
- Licensed venues
- Restaurants
- Leisure venues
- Retail shops
- Boardrooms and conference centres
- Entertainment music playback
- Education centres
- A/V presentations



TECHNICAL SPECIFICATIONS

eSAM702

Inputs Sensitivity (*) / Impedance	
LINE (1-6)	0dBV / 50k Ω
LINE 7	-6dBV* / 50k Ω
Input sensitivity adjust	
MIC 1-6 BAL	35dBV/>1k Ω
MIC/LIN 1-6	\pm 15dB
Outputs Level / Minimum load	
OUT	0(+6)dBV */ 600 Ω
AUX/REC	0dBV/10k Ω
Frequency response	
LINE	10Hz-50kHz - 1dB
MIC BAL	10Hz-30kHz - 1dB
Harmonic distortion	
LINE	<0.005%dB
MIC BAL	<0.04%dB
CMRR	
MIC	>60dB@1kHz
Signal / Noise ratio	
LINE	>110dB
MIC BAL	>85dB
Tone control	
BASS	100Hz \pm 15dB
MID	2kHz \pm 15dB
TREBLE	10kHz \pm 15dB
Talkover	
TIME	2 sec.
EFFECT	-30dB
Phantom voltage	
+18VDC	
DC supply	
\pm 17,5 VDC	
Mains	
100-240VAC + External PSU 17,5VDC	
Power consumption	
16VA	
Dimensions	
Panel	482,6x44mm
Depth	120mm
Weight	
1,8kg	

*internally selectable

MECHANICAL DIAGRAM

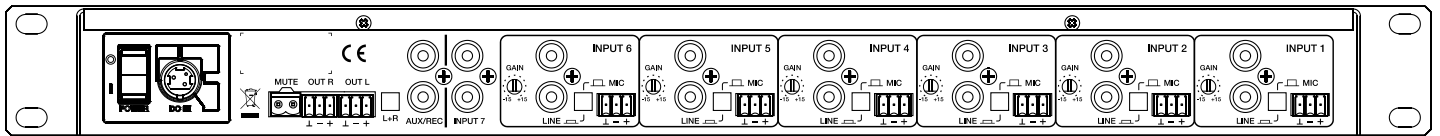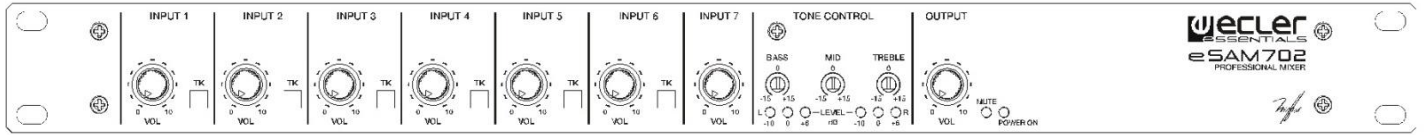

All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical requests address to your supplier, distributor or fill the contact form in our website, at Support / Technical Request.

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | information@ecler.com | www.ecler.com