

# **eMWR**

MICROPHONES Wireless UHF Microphone Receiver



#### PRODUCT OVERVIEW

ECLER ESSENTIALS eMWR is a wireless UHF 823-832MHz microphone receiver, compatible with the eMWE (beltpack) and eMWH (handheld) microphone transmitters. It includes power supply, rack-mount kit, antennas and unbalanced jack-jack cable.

#### **RELATED PRODUCTS**




## **TECHNICAL SPECIFICATIONS**

|    | 1 A |           | _ |
|----|-----|-----------|---|
| NΛ | \/\ | <b>\/</b> | к |
|    |     |           |   |

**Carrier Frequency** UHF 823 - 832MHz Frequency response 60 Hz - 18 kHz XLR + jack connectors (balanced / unbalanced) Output Receive mode Double Conversion Super Heterodyne Intermediate frequency The first medium frequency: 100MHz The second medium frequency: 10.7MHz Wireless interface BNC  $/500\Omega$ Sensitivity 12dBµV (80 dBS/N) Sensitivity adjustment range 12-32dBV Maximum output level + 10 dBV Dimensions (WxHxD) 326 x 48 x 180 mm / 12.83" x 1.88" x 7.08" 1,08 Kg / 2.38 lb Weight eMWR, power supply, rack-mount kit, antennas and Packing contents unbalanced jack-jack cable



## MECHANICAL DIAGRAM

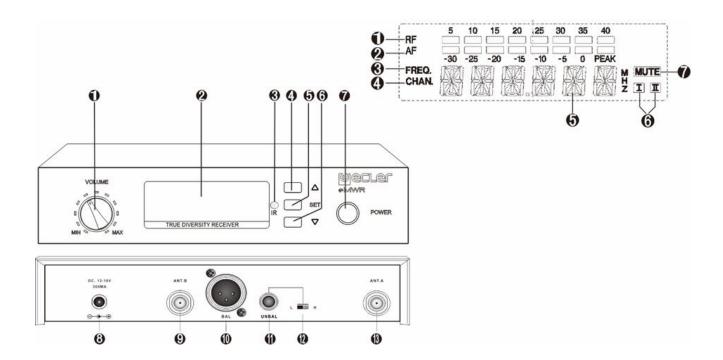

- 1. Volume control
- 2. LCD display
- 3. Infrared receiver
- 4. UP Button
- 5. SET button
- 6. DOWN Button
- 7. POWER button
- 8. DC POWER socket
- 9. Antenna B input socket
- 10. Balanced XLR audio output
- 11. Unbalanced Jack audio output
- 12. Output Level selection switch
- 13. Antenna A input socket

- 1. 8-STEP level display (RF signal)
- 2. 8-STEP level display (AF signal)
- 3. Frequency menu display
- 4. Channel menu display
- 5. 6-character alphanumeric display
- 6. Diversity display (active antenna)
- 7. MUTE display



All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical requests address to your supplier, distributor or fill the contact form in our website, at Support / Technical Request.

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | information@ecler.com | www.ecler.com