


ARQISSB6T

CABINET LOUDSPEAKERS

Ultra slim wall-mount subwoofer

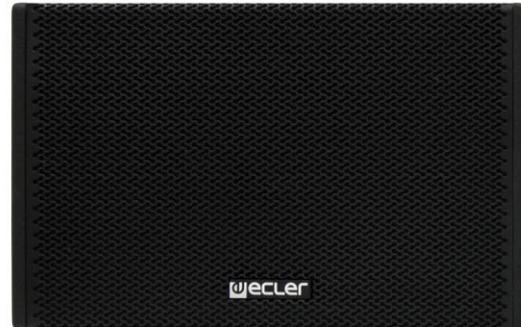

PRODUCT OVERVIEW

ARQISSB6T is a wooden wall-mount subwoofer reinforcement cabinet with a slim and compact format, stylish aesthetics, excellent sound quality and long term reliability, featuring a 6,5" driver and a passive 6,5" radiator. 120 WRMS power @ 8 ohm and integrated 70/100V line transformer with 60 and 120W taps. Internal LPF with OFF, 120HZ and 150 HZ cut-off frequency selections. Installation U-bracket included. Available in white and black finish.

KEY FEATURES

- 6,5" subwoofer + 6,5" passive radiator
- Ready for 70/100V installations: power selector 60/120W & 8 ohm
- Euroblock connector and spring loaded input terminals
- LPF cut-off frequency selection: OFF/ 120Hz / 150Hz
- Wall-mount hardware included
- Available in black or white finish

APPLICATIONS

- Retail stores, shopping malls
- Sports centres
- Theatres / auditoriums
- Conference rooms
- A/V presentations
- Corporate rooms
- Perimeter reinforcement in clubs
- Cafés
- Restaurants


TECHNICAL DATA

Drivers	6,5" subwoofer and 6,5" passive radiator
Nominal low impedance	8Ω
RMS power	120W
Program power	240W
Sensitivity 1W/1m	94dB
Maximum SPL 1W/1m	115dB
Frequency response (±10dB)	60Hz-1.5kHz
Connection	Euroblock connector and spring loaded input terminals
Dimensions (HxWxD)	250x390x150mm
Weight	8.4 kg
Color	Black (RAL 9005) / White (RAL 9016)


FREQUENCY RESPONSE



MECHANICAL DIAGRAMS

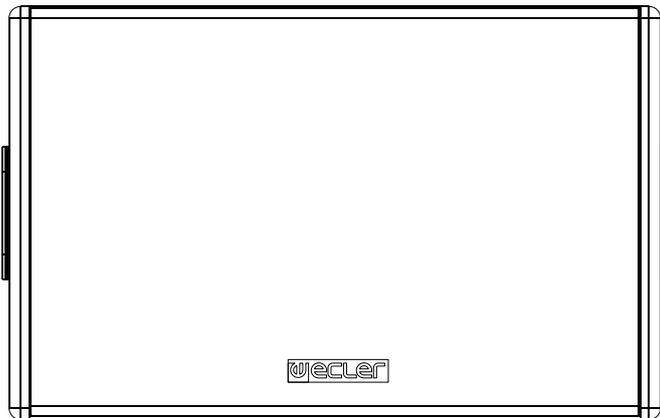

FRONT

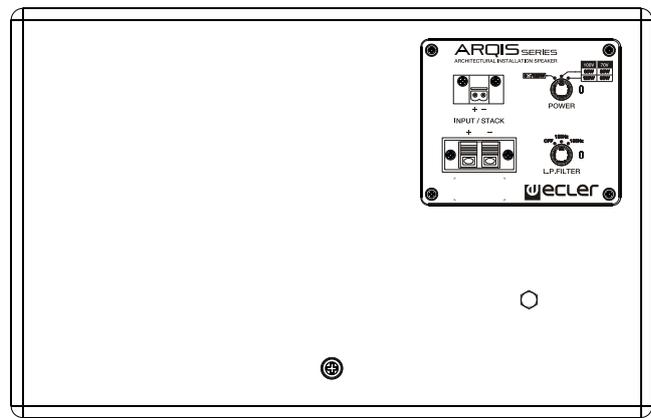

REAR