WPNET8K

DIGITAL CONTROLS AND PANELS

EclerNet wall panel control

PRODUCT OVERVIEW

WPNET8K is an EclerNet compatible wall panel, featuring an LCD screen and 8 direct selection control keys. Its end-user control features are source and preset selection functions. Equipped with Ethernet interface and compatible with PoE (Power over Ethernet) or local power supply (optional).

KEY FEATURES

- Remote control panel of EclerNet devices
- PoE power or by local power supply (WP-PSU model, optional)
- Ethernet communication interface

APPLICATIONS

- End user control in centralized, distributed or hybrid fixed
  installations over long distances
- Integrated digital audio and control solutions using Ethernet networks
- BGM & Paging solutions
- Retail, education, corporate, fitness and Horeca

TECHNICAL DATA

WPNET8K

DIGITAL CHARACTERISTICS:	
Control keys	8 CONTROL keys
Indicators	LCD Display – 128x128 Pixels
Communication Standard	Ethernet
SUPPLY CHARACTERISTICS:	
Poe Power supply	PoE: class 0 802.3af Poe PD compliant
External Power supply	12 - 24VDC
Maximum Power Consumption	From PoE: 35mA / 1.6W From Ext Power: 1.5W (WP24-PSU power supply model)
MISCELLANEOUS:	
Connector	RJ45 Remote port
Finished colour	White (RAL 9016)
Dimensions	W 86mm x D 30mm x H 86mm Compatible with round electrical box (Ø≥60mm), starting from serial nº 266020001 products
Weight	120gr
Cable Quality	CAT-5e or better
Includes accessories	Two cables are included to connect to WPNET4KV and create WPNET12KV

MECHANICAL DIAGRAMS

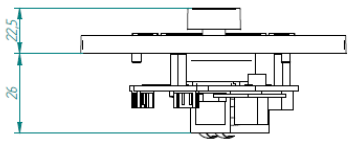









All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical queries contact your supplier, distributor or complete the contact form on our website, in Support / Technical requests.

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | information@ecler.com | www.ecler.com